

West 8170

1/8 DIN Valve Motor Controller



The West 8170 is a process controller designed specifically to drive valve motors, with a unique VMD tuning algorithm.

- Motorized Valve Control
- Two process alarms
- Loop alarm
- RS485 comms
- Ramping setpoint
- Auto/manual tuning
- Dual setpoint selection
- PC configuration



Technical Data

Features

| | |
|----------------------|--|
| Control Types | Full PID with Pre-tune, Self-tune, Manual Tuning, or On-Off control |
| Valve Control | Open loop Valve Motor Drive. Slide-wire feedback from valve is not required |
| Auto/Manual | Selectable from front panel, with bumpless transfer |
| Output Configuration | Up to 3 total. 2 for control (Open/Close Valve), 1 for Alarm or retransmit PV or SP (optional) |
| Alarm 1 & 2 Types | Process high, process low, SP deviation, band, logical OR and hysteresis. Also 1 loop alarm |
| Human Interface | 4 button operation, dual 4 digit 10mm & 8mm high LED displays, plus 3 LED indicators |
| PC Configuration | Off-line configuration from serial port to dedicated config socket (comms option not required) |

Input



| | |
|------------------------|---|
| Thermocouple | J, K, R, S, T, B, L, & N. |
| RTD | 3 Wire PT100, 50Ω per lead maximum (balanced) |
| DC Linear | 0-20/4-20mA, 0-50/10-50mV, 0-5/1-5/0-10/2-10V. Scaleable -1999 to 9999, dec point available |
| Impedance | >100MΩ for Thermocouple and mV ranges, 47KΩ for V ranges and 4.7Ω for mA ranges |
| Accuracy | +/- 0.25% of input span +/- 1 LSD (T/C CJC better than 0.7°C) |
| Sampling | 4 per second, 14 bit resolution approximately |
| Sensor Break Detection | <2 secs (except zero based DC ranges), control O/P's turn off, *high alarms activate (*low for RTD, mA or V). |

Outputs & Options


| | |
|-----------------------------|---|
| Control Relays | Contacts SPDT 2Amp resistive at 120V AC (motor drive) or 240V AC (via contactor), >500,000 operations |
| Solid State (Triac) Outputs | 0.01 to 1 Amp AC 20 to 280V, 47 to 63Hz |
| Alarm Relay | Contacts SPDT 2Amp resistive at 240V AC, >500,000 operations |
| Retransmit Outputs | 0-20/4-20mA into 500Ω max, 0-10/0-5V into 500Ω min. Accuracy typically +/- 0.25% |
| Communications | 2 Wire RS485, 1200 to 9600 Baud, West ASCII |
| Dual Setpoint Selection | Selects between 2 SP's using volt free or TTL input (SP1 = -0.6 to 0.8V, SP2 = 2 to 24V) |

Operating & Environmental

| | |
|-----------------------------|---|
| Temperature & RH | 0 to 55°C (-20 to 80°C storage), 20% to 95%RH non-condensing |
| Power Supply | 90 to 264V 50/60Hz (optional 20 to 55V AC/22 to 65V DC), approx 4 Watts |
| Front Panel Protection | IEC IP66 (Behind panel protection is IP20) |
| Approvals and Certification | CE, UL & ULc |

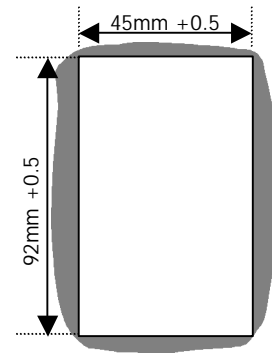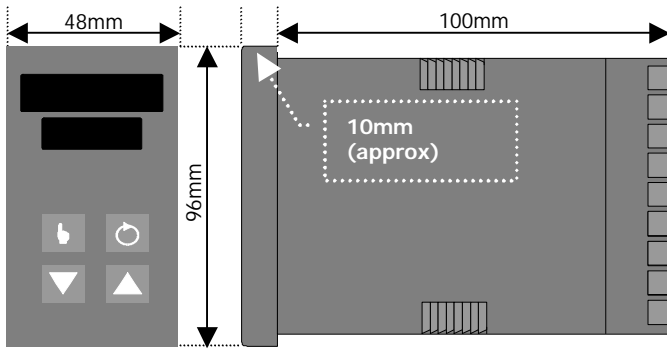

Connection Details

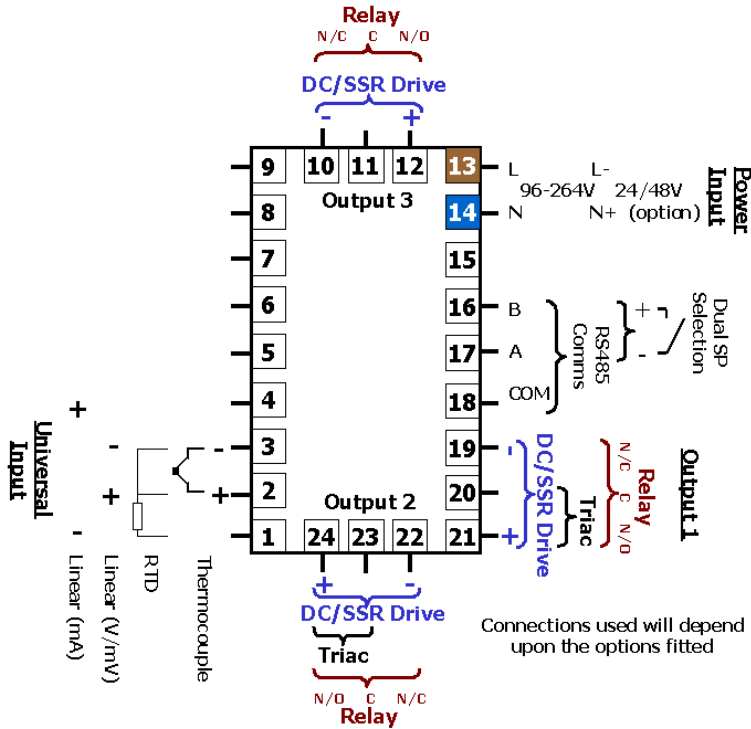

Field Reconfiguration

Input

Configurable to any type, no extra parts required

Output 1

Type is fixed as ordered. Relay or Triac (Valve Open)

Output 2

Type is fixed as ordered. Relay or Triac (Valve Close)

Output 3

Configurable as Alarm via plug-in Relay or SSR modules, or retransmit PV or SP using DC Linear module

Option Slot

Configurable as RS485 comms or dual setpoint selection, via plug-in modules

Order Code

N8171/ Z X X X / XX

Input type

| | |
|---------------------|---|
| 3 Wire RTD or DC mV | 1 |
| Thermocouple | 2 |
| DC mA | 3 |
| DC Voltage | 4 |

Output 1

| | |
|----------------------------|---|
| Relay Control (Valve Open) | 1 |
| Triac Control (Valve Open) | 8 |

Output 2

| | |
|-----------------------------|---|
| Relay Control (Valve Close) | 1 |
| Triac Control (Valve Close) | 8 |

Options and Power Supply

| | |
|----|--------------------------------------|
| 00 | No Options/90-264V AC line supply |
| 02 | No Options/24-48V AC or DC supply |
| 10 | RS485 Comms/90-264V AC supply |
| 12 | RS485 Comms/24-48V AC or DC supply |
| 30 | Dual Setpoint/90-264V AC supply |
| 32 | Dual Setpoint/24-48V AC or DC supply |

Output 3

| | |
|---|--------------------------------|
| 0 | Not fitted |
| 1 | Relay Alarm 1 output |
| 2 | DC for SSR Alarm 1 output |
| 3 | DC 0-10V Re-Transmit PV or SP |
| 4 | DC 0-20mA Re-Transmit PV or SP |
| 5 | DC 0-5V Re-Transmit PV or SP |
| 7 | DC 4-20mA Re-Transmit PV or SP |

<http://instserv.com>

ISE, Inc.

10100 Royalton Rd.
Cleveland, OH 44133 USA

Tel: (440) 237-3200 • Fax: (440) 237-1744

Toledo, OH area:

417 Tomahawk Dr.
Maumee, OH 43537

Tel: (419) 893-3330 • Fax: (419) 893-2151