

# Rustrak 288R

## AC Miniature Strip Chart Recorders



The Rustrak 288R recorders are versatile low cost solutions to many AC Voltage recording applications.

- Large number of input ranges are available.
- Uses pressure sensitive paper.
- No pens to refill or replace.
- Rugged construction


## Technical Data

### Features

Chart Speeds	1"/Hr standard, 1/48" to 240"/Hr optional. Speed can be changed in field with plug-in gear trains available separately.
Printing System	Stylus on pressure sensitive chart paper (Striking paper based on chart speed for continuous line).
Power Supply	120V/60Hz standard; 240/60Hz, 120V/50Hz, 240V/50Hz, 6VDC, 12VDC optional.
Recording Width	2-5/16"
Chart Paper Feed	Internal re-roll or tear-off modes. (User configurable)
Accuracy	+/- 2% of span (10VAC Scale +/- 3%)
Response Time	1 Second maximum
Maximum Short Term Overload	200%
Maximum Continuous	100%
Operating Environment	Indoor (Outdoor with suitable enclosure)
Operating Temperature	0-50C (32-122F)
Storage Temperature	-40 to 70C (-40 to 158F)
Dimensions	3-5/8"W x 5-5/8"H x 4-5/16D
Approximate Weight	3.75 lbs.

### Common Input Ranges

Volts AC	
0-10	61
0-50	62
0-150	63
0-300	64
0-600	65

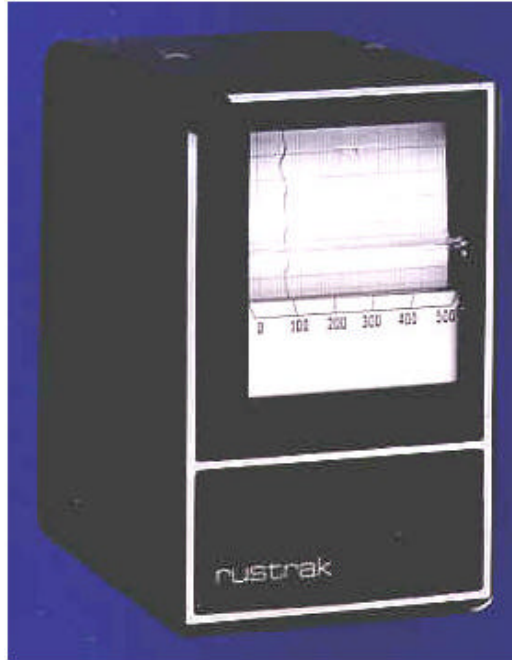

Note: Other ranges are available; Contact ISE with your requirements.

To order specify:

- 1) Model 288R
- 2) Input range
- 3) Power supply voltage
- 4) Desired chart speed (1"/hour is standard)

<http://instserv.com>

**ISE, Inc.**

10100 Royalton Rd.  
Cleveland, OH 44133 USA  
Tel: (440) 237-3200 • Fax: (440) 237-1744

**Toledo, OH area:**

417 Tomahawk Dr.  
Maumee, OH 43537  
Tel: (419) 893-3330 • Fax: (419) 893-2151