

Panel Mount Tachometers

DT-5TG

Advanced microprocessor-controlled design

Shimpo's DT-5TG is a multi-purpose instrument capable of displaying not only RPM, but also surface speed, flow rate, elapsed time and other units. The DT-5TG accepts a variety of modules, enabling it to perform different output functions such as 0-10vdc and 4-20ma, set points (relay closures), RS232C signals, etc.

The DT-5TG is available in three configurations:

DT-5TG-0 Does not accept any modules

DT-5TG-1 Accepts the following modules:

- DOP-FV (voltage/current output)
- DOP-CP (triple relay output)
- DOP-SD (RS232C/Mitutoyo output)
- DOP-BC (BCD output)

DT-5TG-2 Accepts a combination of 2 of the following modules:

- DOP-FV (voltage/current output)
- DOP-CP (triple relay output)
- DOP-SD (RS232C/Mitutoyo output)
- DOP-BC (BCD output)




Features

Benefits

Fully scalable	Select almost any unit of measure
Accepts various modules; works with a variety of sensors	Many output options to select; can match unit with virtually any sensor in the field
Highly accurate	Ideal for applications requiring high precision measurements
Direct programming	Eliminates need to memorize mathematical formulas
Tolerates wide voltage range (85-264VAC 50/60Hz)	Does not require line voltage rewiring
Selectable update time	A must for accelerating/decelerating applications
Provides DC voltage to power various sensors	Saves money; does not require a separate power supply
Easy mounting	Saves time; no hardware required
Convenient front panel programming	Parameters are easily visible
Self-testing ability	Provides peace of mind

Panel Mount Tachometers

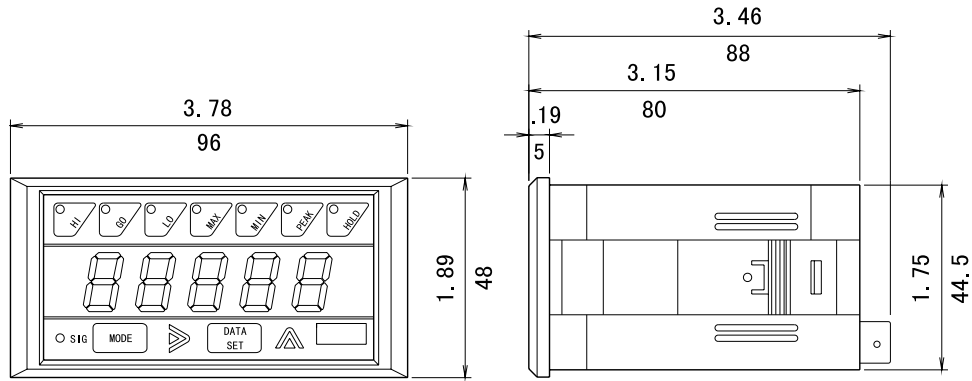

Information on DT-5TG compatible **MODULES** can be found on page 36.



Information on DT-5TG compatible **SENSORS** can be found on pages 38-39.

SPECIFICATIONS

Model	DT-5TG
Display Range	0.0000 - 9.9999, 0.000 - 99.999, 0.00 - 999.99, 0.0 - 9999.9, 0 - 99999
Measuring Range	10 - 99,999 RPM (at 1 p/r), 0.2 - 30,000 RPM (at 60 p/r)
Accuracy	$\pm 0.008\% \pm 1$ digit
Display Update Time	0.25, 0.5, 1, 2, 4, 8, and 16 seconds (selectable)
Time Base	Controlled by a 4.194304 MHz crystal
Display	5 digit 0.56" (14.2 mm) high LED
Input No. of P/R	1 to 9,999 (programmable)
Input Signal Characteristics	Sine wave. max. frequency 10 kHz Square wave. max. frequency 30 kHz Contact closure. max. frequency 20 Hz Open collector with 20 μ sec minimum
Input Signal Amplitude	Sine wave (0.3 - 30 VP-P depending on frequency) Square wave LO : 0 -1.5 V, HI : 4 - 30 V
Input Impedance	10 K Ω for magnetic pickup, rotary encoder and proximity switch only
Sensor Power Supply	12 VDC $\pm 5\%$ (50 mA max.)
Voltage Requirement	85 - 264 VAC (50/60 Hz) (9 - 35 VDC at 1 W also available)
Power Consumption	1 W (5 W when optional modules are used)
Ambient Temperature	32 $^{\circ}$ - 113 $^{\circ}$ F (0 - 45 $^{\circ}$ C)
Weight	0.55 lb (250 g)
Dimensions	3.46" L x 3.78" W x 1.89" H (88 mm x 96 mm x 48 mm)
Warranty	1 year
OPTIONAL ACCESSORIES	Sensors, modules