

# TOWER LIGHTS



IP 56



## PME Series

Ø45mm

LED Steady and Flashing (flash rate 80 / minute)

- LED light provides long life and reliability
- Prism-cut lenses for even light distribution
- Mounting: surface, pole or wall mount (order separately)
- One to five light stacks
- Colors available: blue, clear, green, red & yellow




Stacks	Steady	Flashing	Voltage	Current Draw	Replacement Parts	
					LED	Lens
1 Stack	PME-101-R	PMEF-101-R	12 VDC/AC	41mA	PMELED-4(□)	PML-4(□)
	PME-102-R	PMEF-102-R	24 VDC/AC	27mA		
	PME-110-R	PMEF-110-R	100-220 VAC	28mA		
2 Stack	PME-201-RG	PMEF-201-RG	12 VDC/AC	89mA		
	PME-202-RG	PMEF-202-RG	24 VDC/AC	57mA		
	PME-210-RG	PMEF-210-RG	100-220 VAC	60mA		
3 Stack	PME-301-RYG	PMEF-301-RYG	12 VDC/AC	149mA		
	PME-302-RYG	PMEF-302-RYG	24 VDC/AC	95mA		
	PME-310-RYG	PMEF-310-RYG	100-220 VAC	99mA		
4 Stack	PME-401-RYGB	PMEF-401-RYGB	12 VDC/AC	204mA		
	PME-402-RYGB	PMEF-402-RYGB	24 VDC/AC	125mA		
	PME-410-RYGB	PMEF-410-RYGB	100-220 VAC	131mA		
5 Stack	PME-501-RYGBC	PMEF-501-RYGBC	12 VDC/AC	240mA		
	PME-502-RYGBC	PMEF-502-RYGBC	24 VDC/AC	155mA		
	PME-510-RYGBC	PMEF-510-RYGBC	100-220 VAC	163mA		

(□) – Indicate color of LED or Lens: B, C, G, R, or Y

### DIMENSIONS

Unit: mm

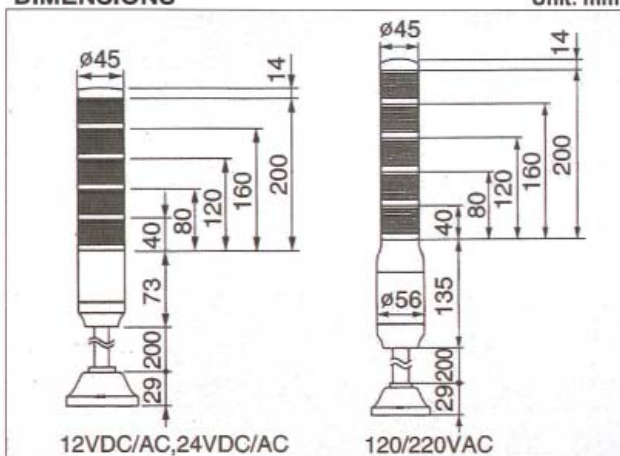

### MOUNTING OPTIONS (see page 11)

Base		Pole	
MAM-B070	Surface mount (plastic)	MAP-0022	22mm pole
		MAP-0240	240mm pole
MAM-DS23-20	Surface mount (aluminum)	MAP-0750	750mm pole
		MAP-1000	1000mm pole
MAM-DS25	90° bracket (steel)	MAP-M043	43mm pole with 1 nut
MAM-DS30-BLK	90° bracket (plastic)	MAP-M240	240mm pole with 2 nuts